


| PART NUMBER | SIZE | "R" | "O" | "H" | "S" MIN | "B" MIN | "L" |
|-------------|------|-----|-----------|-------------------|-------------------|-------------------|---------------------|
| 5123720 | 4" | 48" | $15/16$ " | $9 \frac{3}{8}$ " | $3 \frac{3}{8}$ " | $3 \frac{1}{4}$ " | $9 \frac{7}{16}$ " |
| 5123724 | 5" | 48" | $15/16$ " | $9 \frac{3}{8}$ " | $3 \frac{5}{8}$ " | $4 \frac{1}{4}$ " | $23 \frac{9}{16}$ " |
| 5123725 | 6" | 48" | $15/16$ " | $9 \frac{3}{8}$ " | $3 \frac{3}{4}$ " | 5" | $23 \frac{9}{16}$ " |

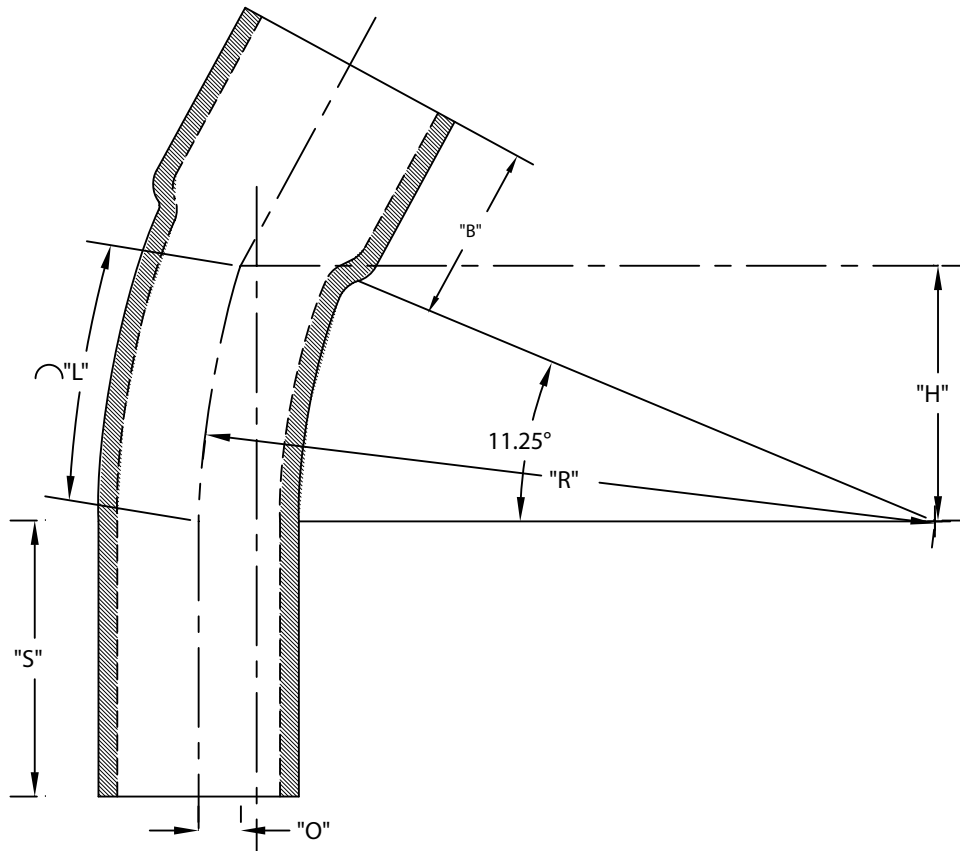

CONFORMS TO NEMA TC 6&8
 MATERIAL IS HIGH MODULUS (HM) 500,000 psi
 BEND TOLERANCE IS $\pm 2^\circ$
 "B" TOLERANCE IS $-\frac{1}{8}$ ", $+\frac{1}{2}$ "

CANTEX
 INC.
 Fort Worth, TEXAS

11 1/4° Elbows Bell End
 DB60 36" Radius Elbows

Drawn By: CD Branch

Date: 10/04/10

Ref.