


PART NUMBRT	SIZE	"R"	"O"	"H"	"S" MIN	"B" MIN	"L"
5123744	2"	24"	1 <sup>13</sup> / <sub>16</sub> "	9 <sup>3</sup> / <sub>16</sub> "	2"	2"	9 <sup>7</sup> / <sub>16</sub> "
5123801	3"	24"	1 <sup>13</sup> / <sub>16</sub> "	9 <sup>3</sup> / <sub>16</sub> "	3 <sup>1</sup> / <sub>8</sub> "	2 <sup>1</sup> / <sub>2</sub> "	9 <sup>7</sup> / <sub>16</sub> "
5123753	4"	24"	1 <sup>13</sup> / <sub>16</sub> "	9 <sup>3</sup> / <sub>16</sub> "	3 <sup>3</sup> / <sub>8</sub> "	3 <sup>1</sup> / <sub>4</sub> "	9 <sup>7</sup> / <sub>16</sub> "

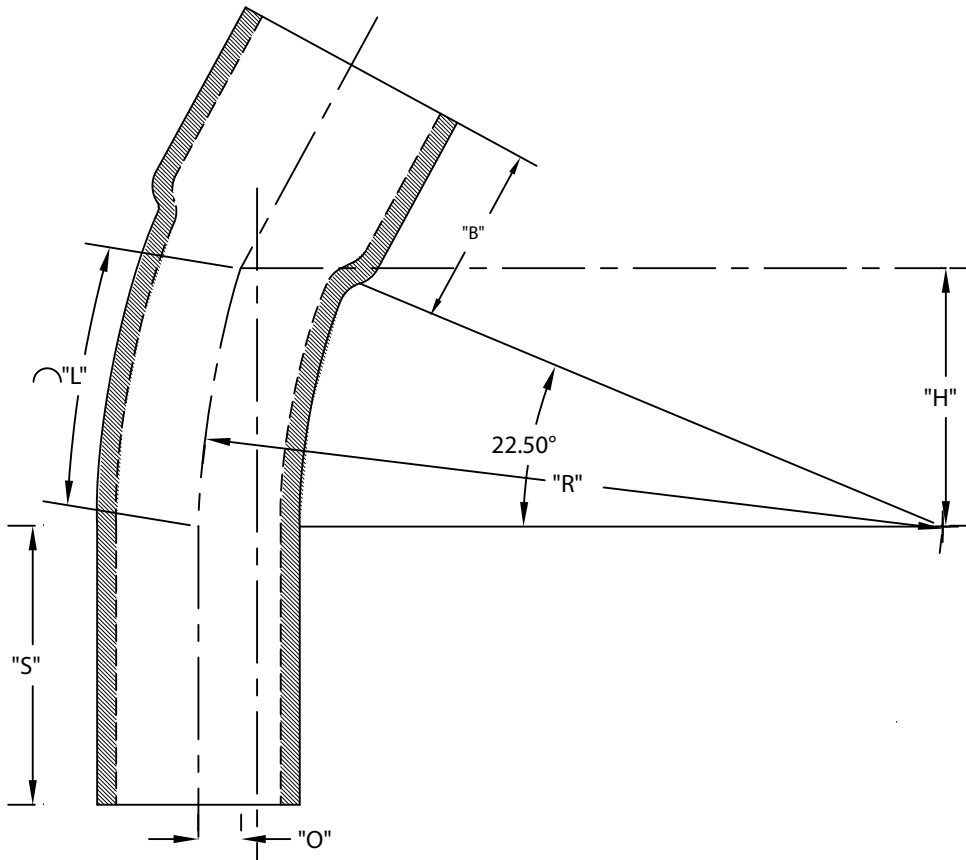

CONFORMS TO NEMA TC 6&8  
MATERIAL IS HIGH MODULUS (HM) 500,000 psi  
BEND TOLERANCE IS  $\pm 2^\circ$   
"B" TOLERANCE IS  $-\frac{1}{8}$ ",  $+\frac{1}{2}$ "

**CANTEX**  
INC.

Fort Worth, TEXAS

22-1/2° Elbows Bell End  
DB60 24" Radius Elbows

Drawn By: CD Branch

Date: 10/15/07

Ref.