


PART NUMBER	SIZE	"R"	"O"	"H"	"S" MIN	"B" MIN	"L"
5125754	3"	36"	4 <sup>13</sup> / <sub>16</sub> "	18"	3 <sup>1</sup> / <sub>8</sub> "	2 <sup>1</sup> / <sub>2</sub> "	18 <sup>7</sup> / <sub>8</sub> "
5125761	4"	36"	4 <sup>13</sup> / <sub>16</sub> "	18"	3 <sup>3</sup> / <sub>8</sub> "	3 <sup>1</sup> / <sub>4</sub> "	18 <sup>7</sup> / <sub>8</sub> "
5125792	5"	36"	4 <sup>13</sup> / <sub>16</sub> "	18"	3 <sup>5</sup> / <sub>8</sub> "	5"	18 <sup>7</sup> / <sub>8</sub> "

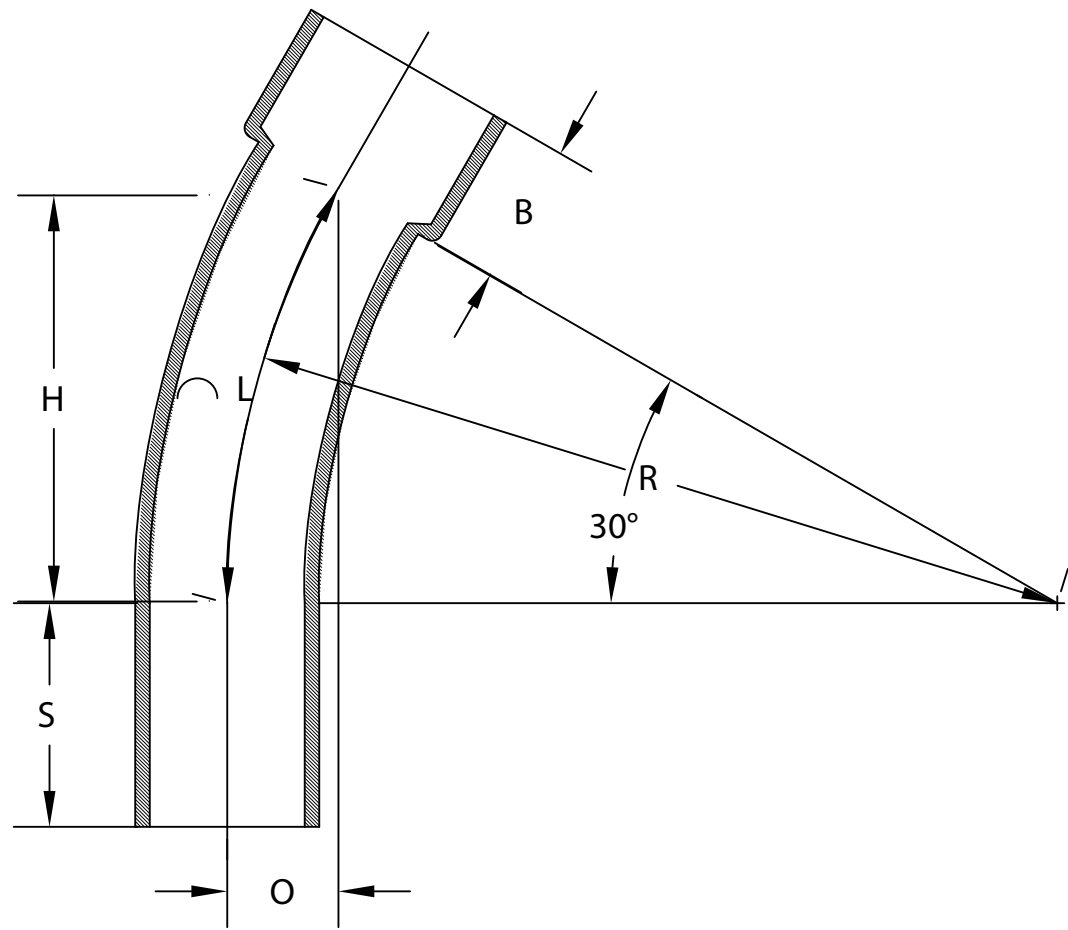

CONFORMS TO NEMA TC 6&8  
 MATERIAL IS HIGH MODULUS (HM) 500,000 psi  
 BEND TOLERANCE IS  $\pm 2^\circ$   
 "B" TOLERANCE IS  $-\frac{1}{8}"$ ,  $+\frac{1}{2}"$

<b>CANTEX</b> INC.		
Fort Worth, TEXAS		
30° Elbows Bell End DB60 36" Radius Elbows		
Drawn By: CD Branch	Date: 10/15/07	Ref.