


PART NUMBER	SIZE	"R"	"O"	"H"	"S" MIN	"B" MIN	"L"
5233763	1/2 "	4"	1 3/16 "	2 13/16 "	1 1/2 "	1"	3 1/8 "
5233764	3/4"	4 1/2 "	1 5/16 "	3 3/16 "	1 1/2 "	1 1/2"	3 1/2 "
5233765	1"	5 3/4"	1 11/16 "	4 1/16 "	1 7/8"	1 1/2"	4 1/2 "
5233766	1 1/4 "	7 1/4 "	2 1/8 "	5 1/8 "	2"	1 1/2"	5 11/16 "
5233767	1 1/2 "	8 1/4 "	2 7/16 "	5 13/16 "	2"	2"	6 1/2 "
5233768	2"	9 1/2 "	2 13/16 "	6 3/4"	2"	2"	7 1/2 "
5233769	2 1/2 "	10 1/2 "	3 1/16 "	7 7/16 "	3"	2 1/4"	8 1/4 "
5233770	3"	13"	3 13/16 "	9 3/16 "	3 1/2 "	2 1/2"	10 3/16 "
5233771	3 1/2 "	15"	4 3/8"	10 5/8"	3 1/4 "	3 1/4"	11 13/16 "
5233772	4"	16"	4 11/16 "	11 3/16 "	3 3/8"	3 1/4"	12 9/16 "
5233773	5"	24"	7"	17"	3 5/8"	4 1/4"	18 7/8"
5233774	6"	30"	8 7/8"	21 1/4 "	3 3/4"	5"	23 9/16 "



ETL LISTED
 CONFORMS TO UL651
 ETL CONTROL #3107144
 CONFORMS TO NEMA TC3
 SEE NEC ARTICLE 352 FOR USE
 MATERIAL IS RIGID PVC
 BEND TOLERANCE IS $\pm 2^\circ$
 "B" TOLERANCE IS $-\frac{1}{8}"$, $+\frac{1}{2}"$

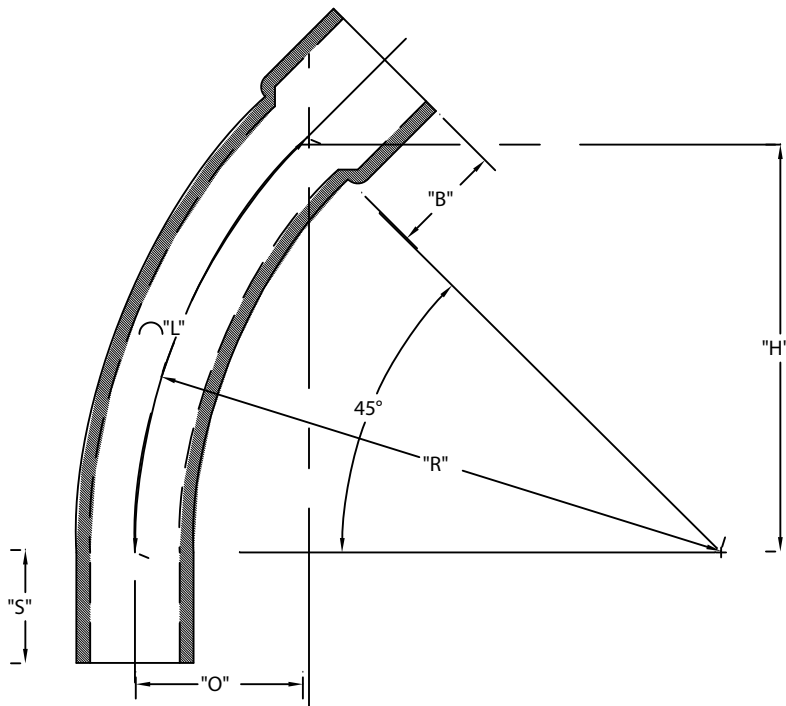

CANTEX
 INC.
 Fort Worth, TEXAS

45° Elbows Bell End
 Schedule 40 Standard Radius Elbows

Drawn By: CD Branch

Date: 10/15/07

Ref.